



REV.	DESCRIPTION	DATE	DRAFTER	APPROVER
A1	DWG.REL	2020.05.19	DENG	JIN

- Material  
 @Screws : M3.0 steel, Zinc plated,  
 \*-\* slot type  
 @Housing : PA66, UL94V-0  
 @Clamp : Copper alloy, Ni-plated  
 @Pin header : Copper alloy, Tin plated
- Electrical  
 UL IEC  
 Rated voltage : 300V 250V  
 Rated current : 10A 18A  
 Contact resistance : 20mΩ(Max)  
 Insulation resistance: 500MΩ/DC500V  
 Withstanding Voltage : AC2000V/1min  
 Wire range: 24-12AWG 2.5mm<sup>2</sup>
- Mechanical  
 Operating temperature: -40°C~+105°C  
 Soldering temperature:250°C±5/5sec  
 Torque: 0.5N.m (4.43Lb.in)  
 Strip length: 6-7mm
- RoHS compliance

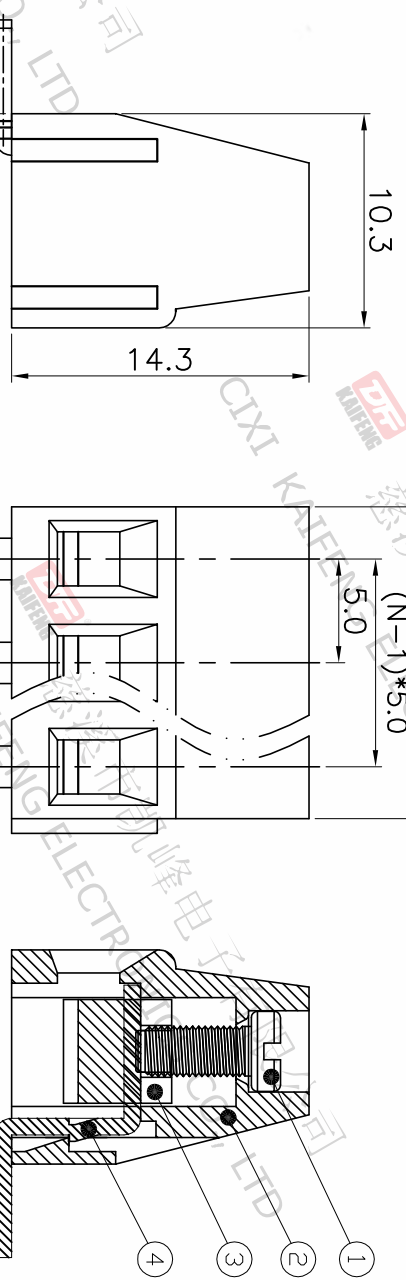

Pitch range	Nominal dimension range	PROJECTION
>0	>0	0.1/10
>6	>30	□
~	~	□
>10	>60	□
~	~	□
24	60	□
~	100	□
30	150	□
~	~	□
±0.15	±0.30	±2°
±0.20	±0.50	□
±0.30	±0.70	□
±1.00	±1.30	□

DRAWING TYPE	CUSTOMER DRAWING
SCALE	1:1
SHEET	1 OF 1
DRAWING NO.	W15000542

PROJECTION	UNIT	TITLE
①	mm	KF128R-5.0-XXP-1X
②	mm	
SHEET SIZE	A4	SERIES KF128

HOW TO ORDER  
 KF128R-5.0-XXP-1 X-XXXXX

MODEL Pitch:mm  
 No. of poles: 2~24P

Color: Customer Request  
 G:Green R:Red  
 K:Black W:White  
 O:Orange B:Blue  
 GR:Gray

1:Single Pitch  
 2:Double Pitch

**DF** 慈溪市凯峰电子有限公司  
 CIXI KAIFENG ELECTRONICS CO.,LTD