

REV.	DESCRIPTION	DATE	DRAFTER	APPROVER
A1	DWG.REL	2020.5.20	ZHANG	JIN







- Material
 @Housing : PA66, UL94V-0
 @Long Pin: Copper alloy, Tin plated
 @Short Pin: Copper alloy, Tin plated

- Electrical
 UL IEC
 Rated voltage : 300V 320V
 Rated current : 10A 13.4A

- Mechanical
 Operating temperature: $-40^{\circ}\text{C} \sim +105^{\circ}\text{C}$
 Soldering temperature: $250^{\circ}\text{C} \pm 5/5\text{sec}$

- RoHS compliance

HOW TO ORDER
 KF12EDCR-3.5-2*XXP-1 X-XXXXX

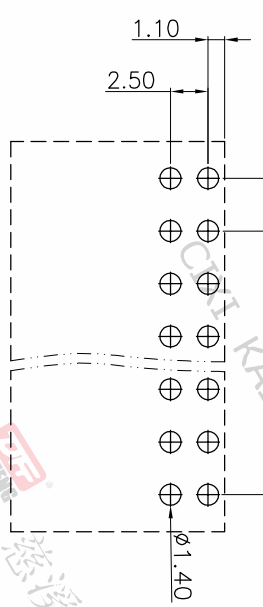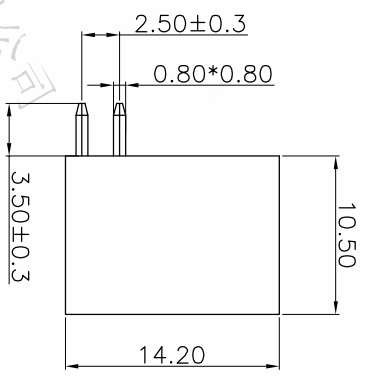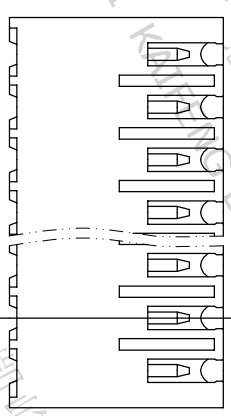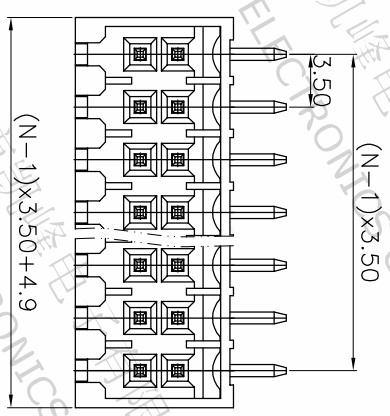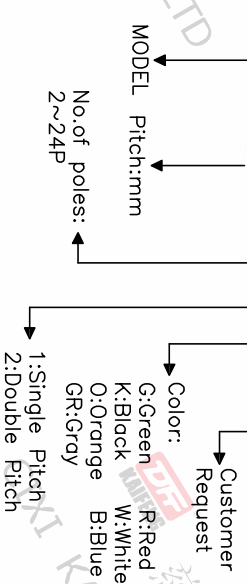

Pitch range	Nominal dimension range	Projection
>0	>0	0.1/10
~6	~30	~
~10	~60	~
~24	~100	~
~30	~150	~
±0.15	±0.30	±2°
±0.20	±0.50	±2°
±0.30	±0.70	±2°
±0.50	±1.00	±2°
±1.00	±1.30	±2°

DRAWING NO.	SCALE	DRAWING TYPE
W10001002	1:1	CUSTOMER DRAWING
	SHEET	1 OF 1

PROJECTION	UNIT	TITLE
	mm	KF12EDCR-3.5-2*XXP-1X
SHEET SIZE	A4	SERIES
		KF12EDCR

DF 慈溪市凯峰电子有限公司
 CIXI KAIFENG ELECTRONICS CO.,LTD