
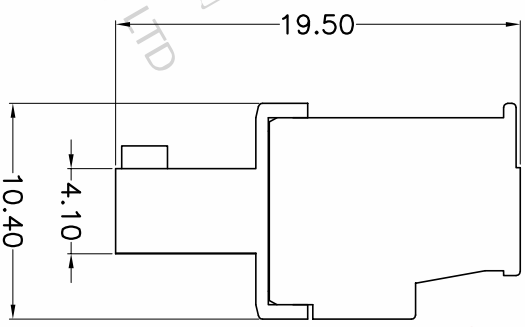
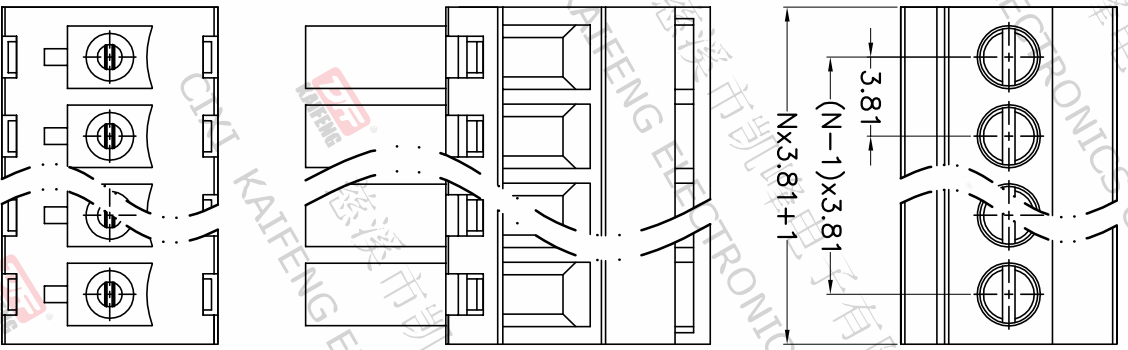


REV.	DESCRIPTION	DATE	DRAFTER	APPROVER
A1	DWG.REL	2020.6.10	ZHANG	JIN

- Material
 - ①Screw : M2.0 steel,Zinc plated,“-” slot type
 - ②Housing : PA66, UL94V-0
 - ③Contact : Copper alloy,Tin plated
 - ④Clamp : Copper alloy, Ni plated
 - ⑤Cover : PA66, UL94V-0
- Electrical

UL	IEC
Rated voltage : 300V	250V
Rated current : 8A	7A
- Mechanical
 - Operating temperature: -40°C~+105°C
 - Soldering temperature: 250°C±5/5sec
 - Torque: 0.2N.m (1.77lb.in)
 - Strip length: 6-7mm
- RoHS compliance

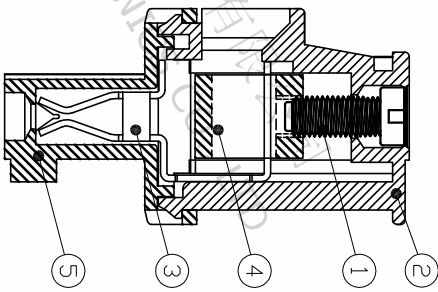

Pitch range	Nominal dimension range	PROJECTION	UNIT
>0	>0	0.1/10	mm
~6	~30		
~10	~60		
~24	~100		
±0.15	±0.30		±2°

HOW TO ORDER
 KF12EKB-3.81-XXP-1 X-XXXXX

Customer Request

Color:

G:Green	R:Red
K:Black	W:White
O:Orange	B:Blue
GR:Gray	

MODEL Pitch:mm

No.of poles: 2~24P

1:Single Pitch
 2:Double Pitch

DRAWING TYPE	CUSTOMER DRAWING
SCALE	1:1
SHEET	1 OF 1
DRAWING NO.	W10001182

DFE 慈溪市凯峰电子有限公司
 CIXI KAIFENG ELECTRONICS CO.,LTD

TITLE: KF12EKB-3.81-XXP-1X
 SHEET SIZE: A4
 SERIES: KF12EKB

