

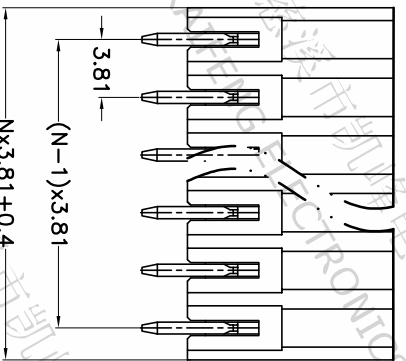


REV.	DESCRIPTION	DATE	DRAFTER	APPROVER
A1	DWG.REL	2020.6.02	ZHANG	JIN

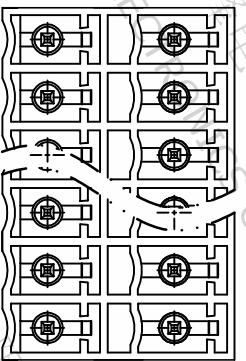

- Material
 ØHousing : PA66, UL94V-0
 ØPin header : Copper alloy, Tin plated


- Electrical
 UL IEC
 Rated voltage : 300V 250V
 Rated current : 8A 7A

- Contact resistance : 20mΩ(Max)
 Insulation resistance: 500MΩ/DC500V
 Withstanding Voltage : AC1500V/1min

- Mechanical
 Operating temperature: -40°C~+105°C
 Soldering temperature: 250°C±5/5sec

- RoHS compliance

HOW TO ORDER
 KF12EKN-V-3.81-2*XXP-1 X-XXXXX

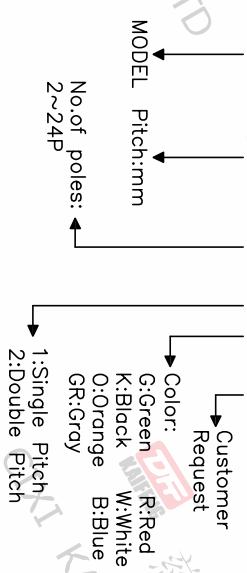

P.C.B.LAYOUT

Pitch range	Nominal dimension range	Projection	UNIT
>0	>0	0.1/10	mm
~6	~30	≤	mm
~10	~60	≤	mm
~24	~100	≤	mm
~30	~150	≤	mm
±0.15	±0.30	±2'	mm

DRAWING TYPE	CUSTOMER DRAWING
SCALE	1:1
DRAWING NO.	W10002072

PROJECTION	TITLE
UNIT	KF12EKN-V-3.81-2*XXP-1X
SHEET SIZE	A4
SERIES	KF12EKN-V

DF 慈溪市凯峰电子有限公司
 CIXI KAIFENG ELECTRONICS CO.,LTD

