

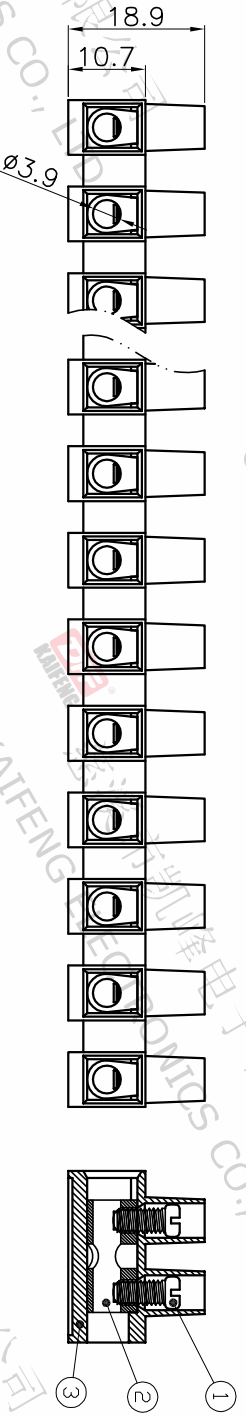


REV.	DESCRIPTION	DATE	DRAFTER	APPROVER
A1	DWG.REL	2020.05.29	DENG	JIN

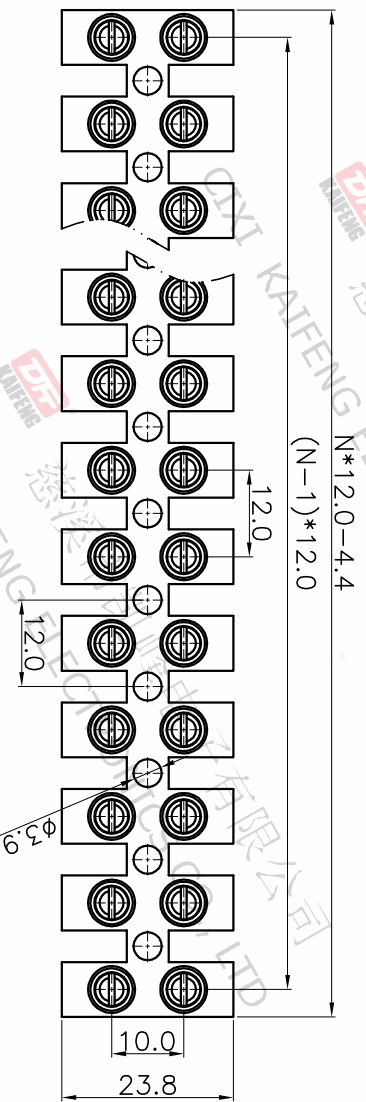

- Material
 ØScrews : M3.5 steel, Zinc plated
 ØClamp : Brass, Ni plated
 ØHousing : PA66, UL94V-2
- Electrical
 UL IEC
 Rated voltage : 600V 500V
 Rated current : 30A 57A
 Wire range: 16-8AWG 1.5~10.0mm²
 Withstanding Voltage : AC2200V/1min
- Mechanical
 Operating temperature:-40°C~+110°C
 Soldering temperature:250°C±5/5sec
 Torque: 0.8N.m (7.02Lb.in)
 Strip length: 6-7mm
- RoHS compliance

HOW TO ORDER

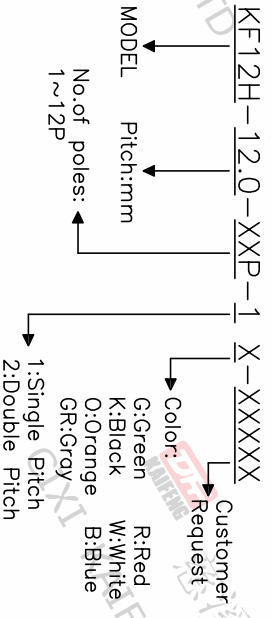

Pitch range	Nominal dimension range	PROJECTION
>0	>0	0.1/10
~6	>30	≤
~10	>60	±2'
~24	>100	
~30	>150	
±0.15 ±0.20 ±0.30	±0.30 ±0.50 ±0.70 ±1.00 ±1.30	

DF 慈溪市凯峰电子有限公司
CIXI KAIFENG ELECTRONICS CO.,LTD

DRAWING NO. W18000082

SCALE 1:1 SHEET 1 OF 1

DRAWING TYPE CUSTOMER DRAWING

TITLE KF12H-12.0-XXP-1X

SHEET SIZE A4

SERIES KF12H