

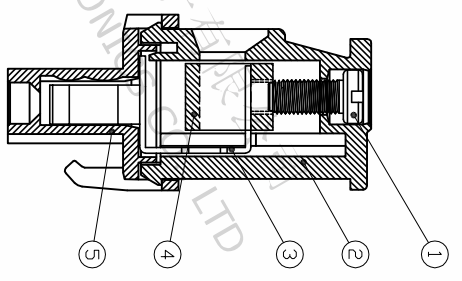
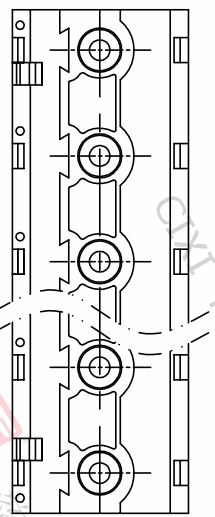
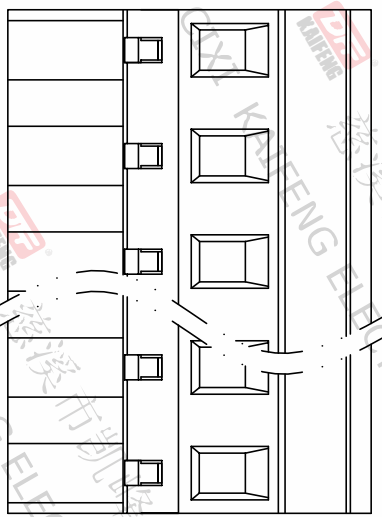


REV.	DESCRIPTION	DATE	DRAFTER	APPROVER
A1	DWG.REL	2020.5.23	ZHANG	JIN

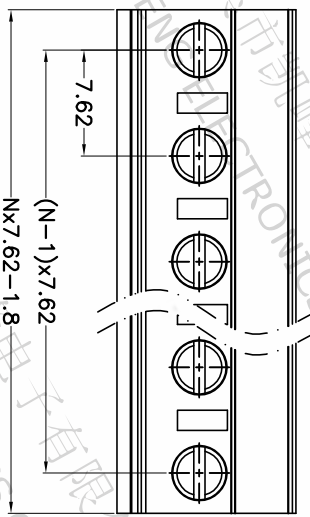

- Material  
 @Screw : M2.5 steel, Zinc plated, ← slot type  
 @Housing : PA66, UL94V-0  
 @Contact : Copper alloy, Tin plated  
 @Clamp : Copper alloy, Ni plated  
 @Cover : PA66, UL94V-0
- Electrical  
 UL IEC  
 Rated voltage : 300V 400V  
 Rated current : 15A 18A  
 Contact resistance : 20mΩ(Max)  
 Insulation resistance : 500MΩ/DC500V  
 Withstanding Voltage : AC2500V/1min  
 Wire range : 28-12AWG 2.5mm<sup>2</sup>
- Mechanical  
 Operating temperature: -40°C ~ +105°C  
 Soldering temperature: 250°C ±5/5sec  
 Torque: 0.4N.m (3.54lb.in)  
 Strip length: 7-8mm
- RoHS compliance

HOW TO ORDER  
 KF2EDGKB-7.62-XXP-1 X-XXXXX

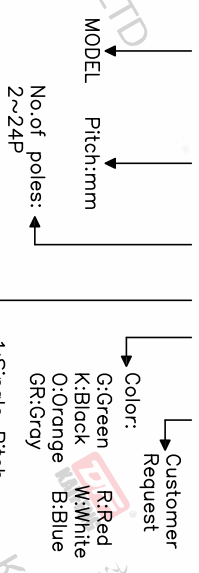

Pitch range	Nominal dimension range	PROJECTION	UNIT	TITLE
>0	>0	mm		KF2EDGKB-7.62-XXP-1X
~6	>30			
~10	~60			
~24	~100			
±0.15 ±0.20 ±0.30 ±0.50 ±0.70 ±1.00 ±1.30	±0.30 ±0.50 ±0.70 ±1.00 ±1.30 ±2			
DRAWING TYPE	CUSTOMER DRAWING			
SCALE	1:1	SHEET	1 OF 1	
DRAWING NO.	W10000422			

**DF** 慈溪市凯峰电子有限公司  
 CIXI KAIFENG ELECTRONICS CO.,LTD

PROJECTION UNIT TITLE  
 mm  
 SHEET SIZE A4 SERIES KF2EDGKB