
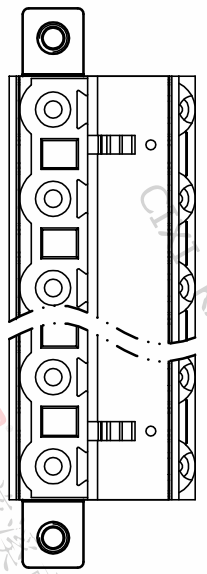


REV.	DESCRIPTION	DATE	DRAFTER	APPROVER
A1	DWG.REL	2020.5.30	ZHANG	JIN

- Material
 - ØButton : PA66, UL94V-0
 - ØHousing : PA66, UL94V-0
 - ØReed : Stainless steel
 - ØContact : Copper alloy, Tin plated
 - ØCover : PA66, UL94V-0
 - ØScrew : M2.5 steel, Zinc plated
- Electrical
 - UL IEC
 - Rated voltage : 300V 400V
 - Rated current : 15A 20A
 - Contact resistance : 20mΩ(Max)
 - Insulation resistance : 500MΩ/DC500V
 - Withstanding Voltage : AC2000V/1min
 - Wire range : 28-14AWG 2.5mm²
- Mechanical
 - Operating temperature: -40°C~+105°C
 - Soldering temperature: 250°C±5/5sec
 - Strip length: 10-11mm
- RoHS compliance

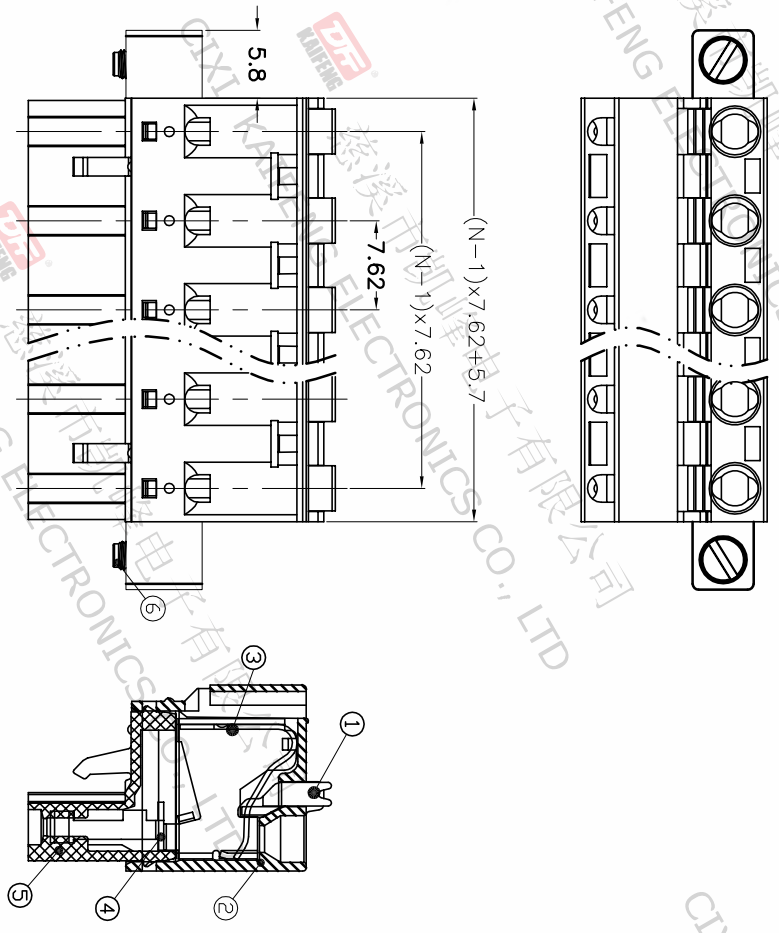

Pitch range	Nominal dimension range	Projection	UNIT
>0	>6	>10	0.1/10
~	~	~	mm
6	10	24	<
±0.15	±0.20	±0.30	±2°
	±0.30	±0.50	
	±0.70	±1.00	
	±1.30		


DRAWING TYPE	CUSTOMER DRAWING	DRAWING NO.	SCALE	SHEET	1 OF 1
1:1	1	W10000492	1:1	1	1

HOW TO ORDER
 KF2EDGKDM-7.62-XXP-1 X-XXXXX

MODEL Pitch:mm No.of poles: 2~24P

Color: Customer Request
 G:Green R:Red
 K:Black W:White
 O:Orange B:Blue
 GR:Gray

1:Single Pitch
 2:Double Pitch

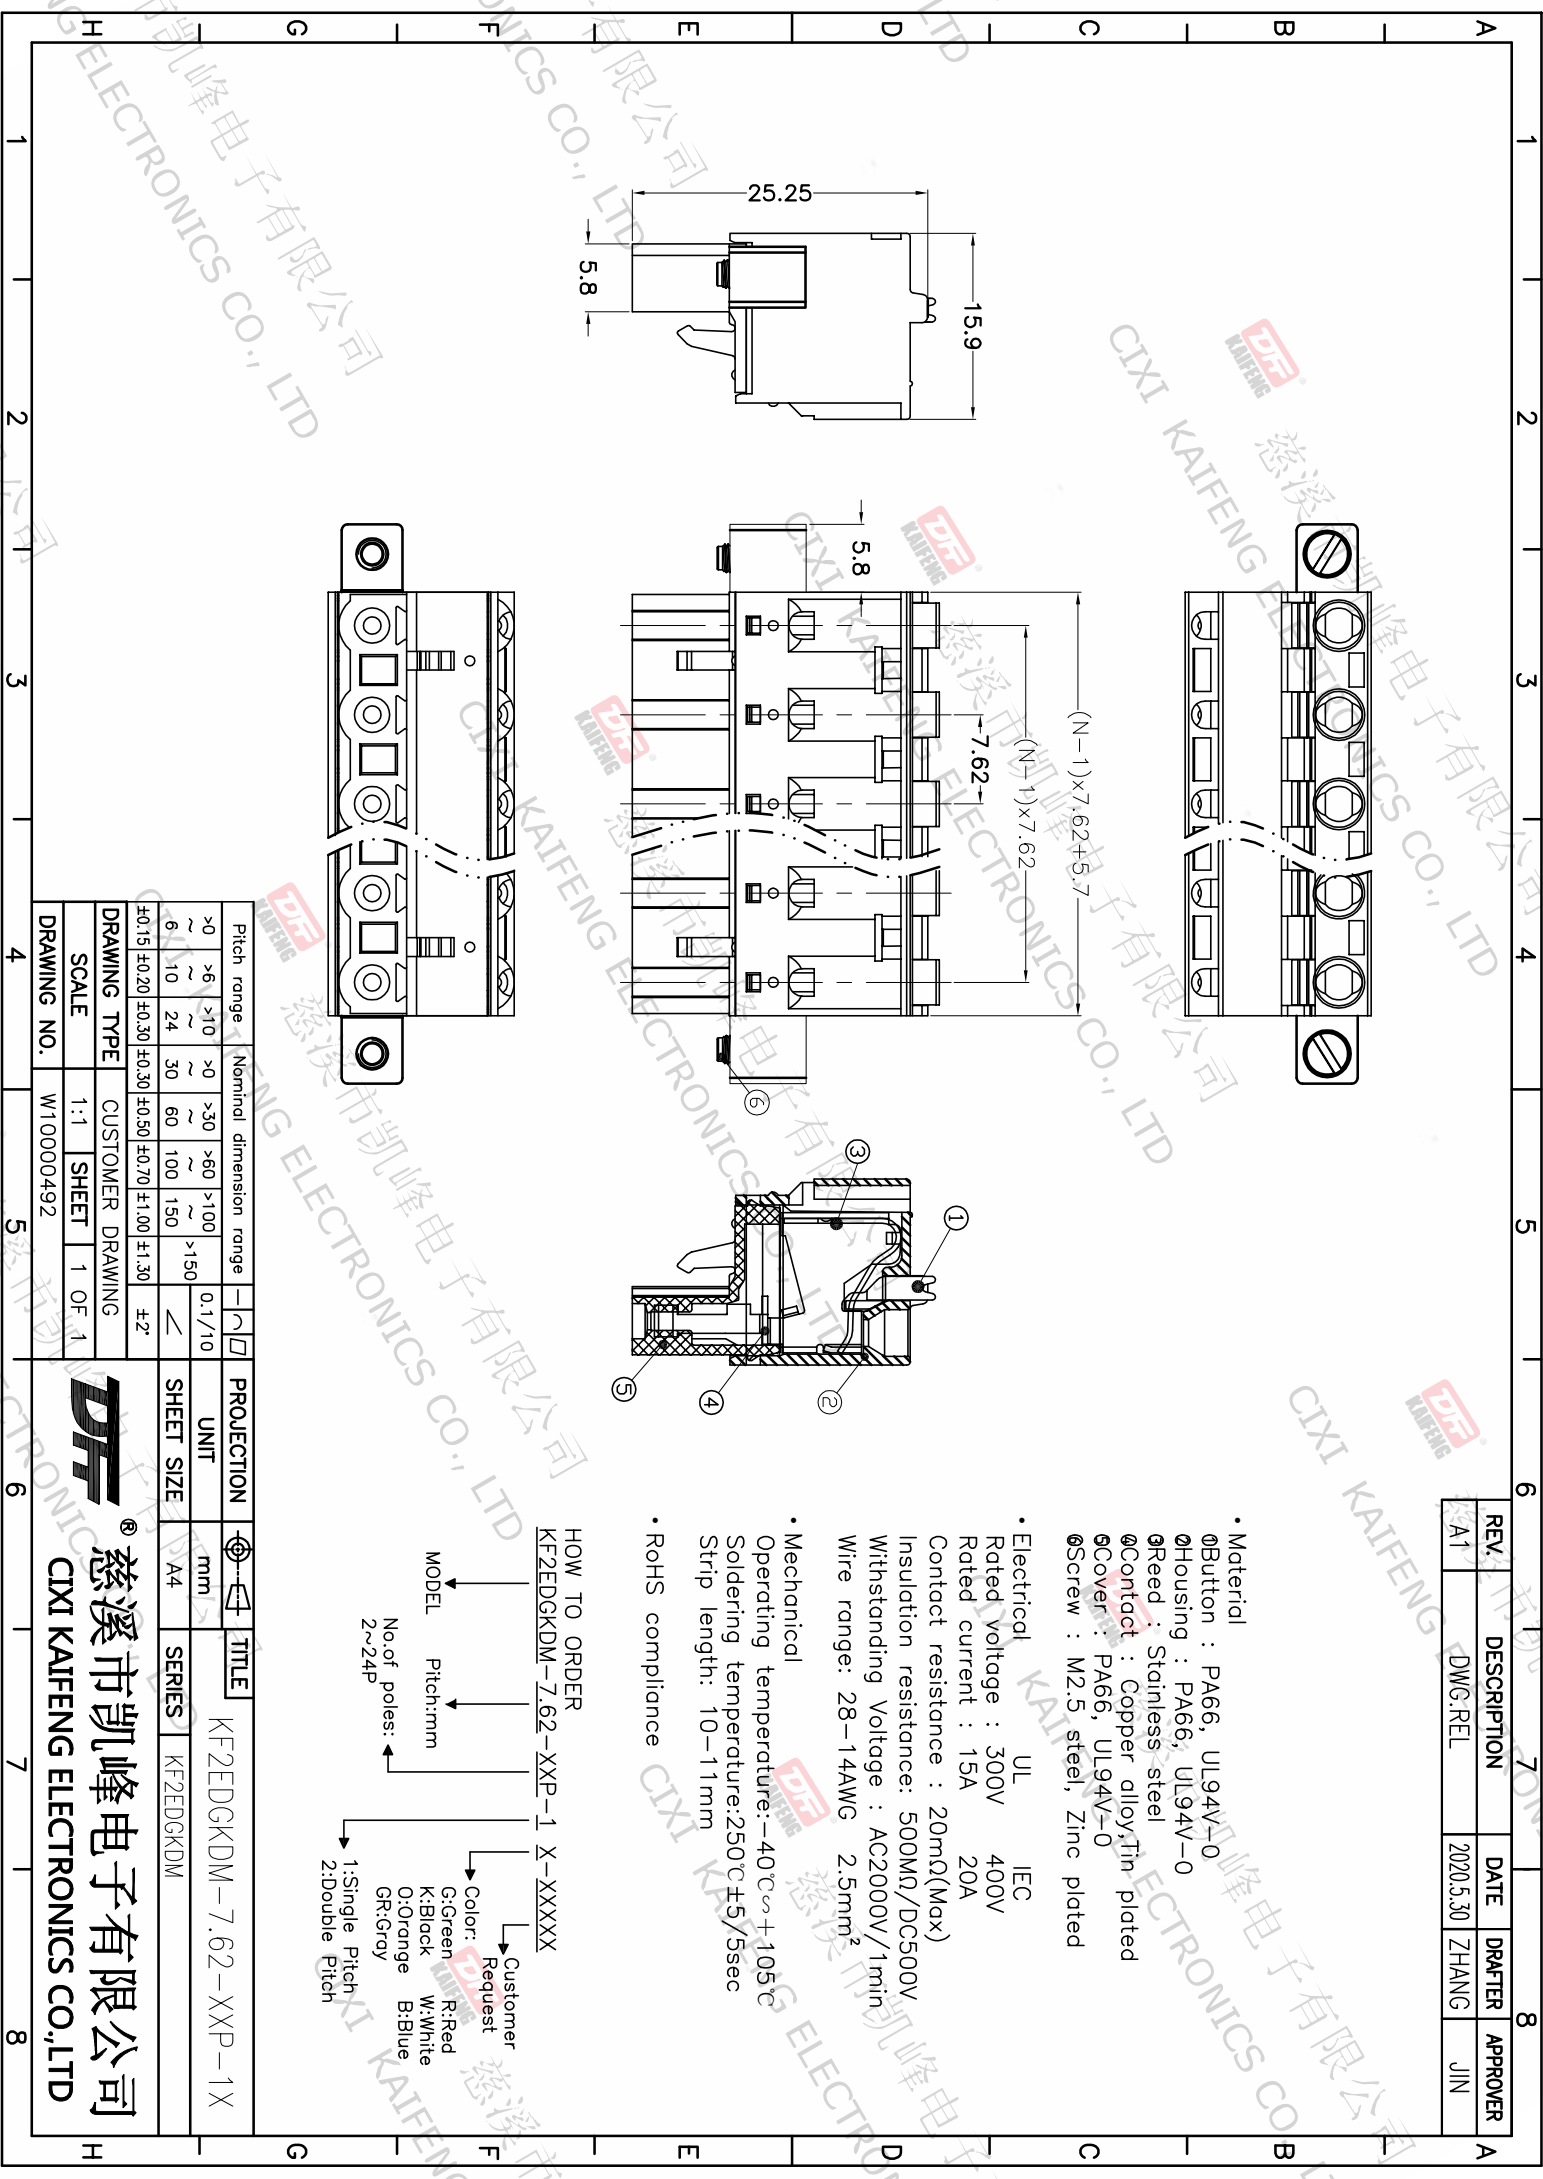

慈溪市凯峰电子有限公司
 CIXI KAIFENG ELECTRONICS CO., LTD

DFE
 慈溪市凯峰电子有限公司
 CIXI KAIFENG ELECTRONICS CO.,LTD