

REV.	DESCRIPTION	DATE	DRAFTER	APPROVER
A1	DWG.REL	2020.6.02	ZHANG	JIN



- Material
  - ①Screw : M3.0 steel, Zinc plated, \*- slot type
  - ②Housing : PA66, UL94V-0
  - ③Contact : Copper alloy, Tin plated
  - ④Clamp : Copper alloy, Ni plated
  - ⑤Cover : PA66, UL94V-0
  - ⑥Screw : M2.5 steel, Zinc plated, \*- slot type

- Electrical
  - UL IEC
  - Rated voltage : 300V 320V
  - Rated current : 15A 20A
  - Contact resistance : 20mΩ(Max)
  - Insulation resistance: 500MΩ/DC500V
  - Withstanding Voltage : AC2000V/1min
  - Wire range: 28-12AWG 2.5mm<sup>2</sup>

- Mechanical
  - Operating temperature: -40℃~+105℃
  - Soldering temperature: 250℃±5/5sec
  - Torque: 0.5N.m (4.43lb.in)
  - Strip length: 7-8mm

• RoHS compliance

HOW TO ORDER  
KF2EDGM-X-5.08-XXP-1 X-XXXXX

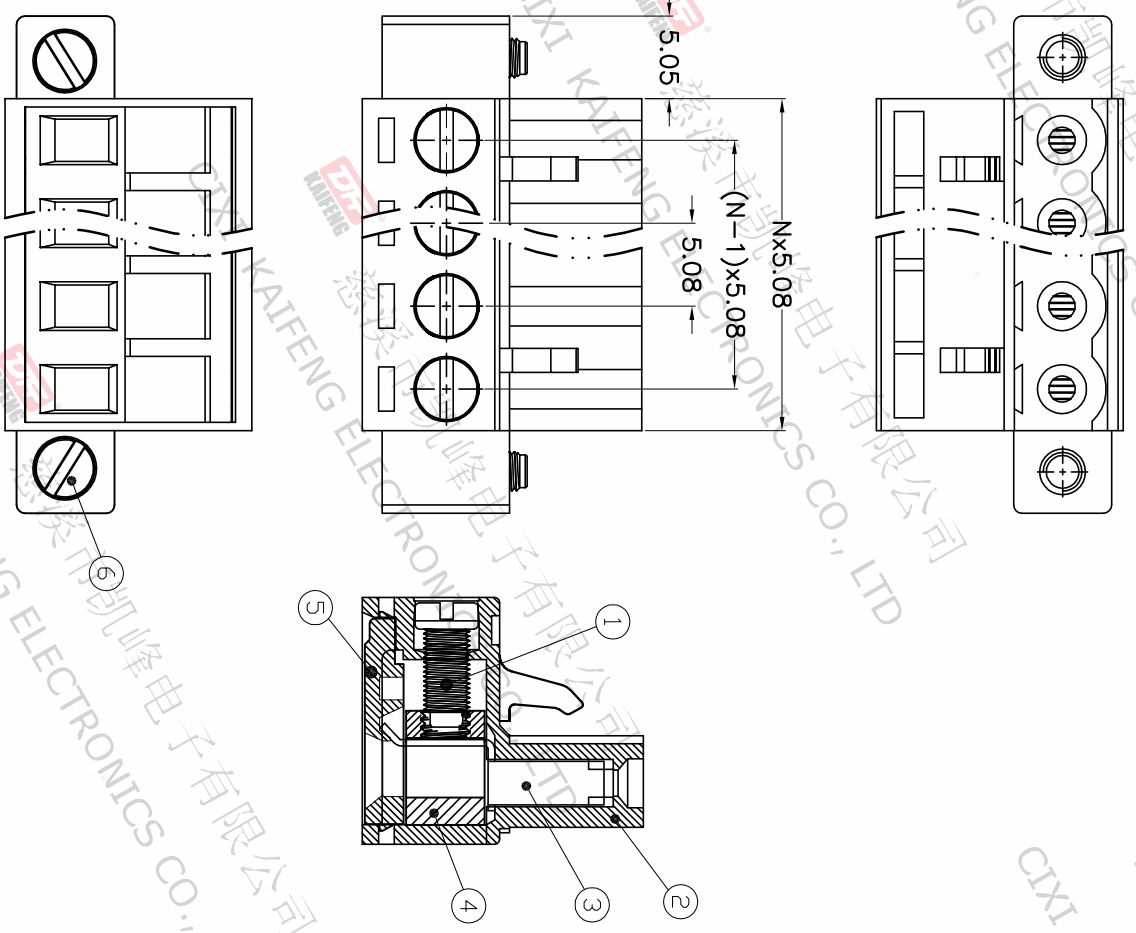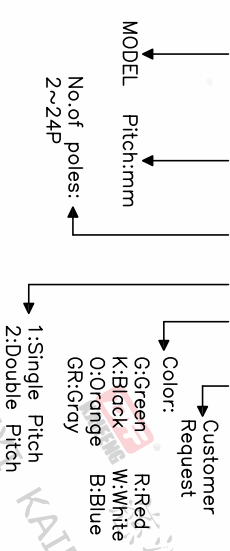

Pitch range	Nominal dimension range	Projection	UNIT	TITLE
>0	>10	0.1/10	mm	KF2EDGM-X-5.08-XXP-1X
>6	>30	0.1/10	mm	
6	30	0.1/10	mm	
10	60	0.1/10	mm	
24	100	0.1/10	mm	
	150	0.1/10	mm	
	100	0.1/10	mm	
	150	0.1/10	mm	
	100	0.1/10	mm	
	150	0.1/10	mm	
	±2'			

**DF** 慈溪市凯峰电子有限公司  
CIXI KAIFENG ELECTRONICS CO.,LTD

DRAWING NO. W10000592

SCALE 1:1 SHEET 1 OF 1

DRAWING TYPE CUSTOMER DRAWING