
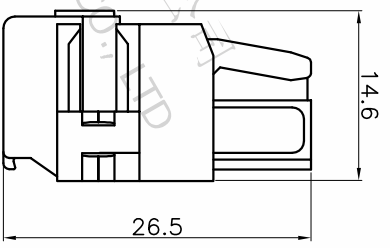
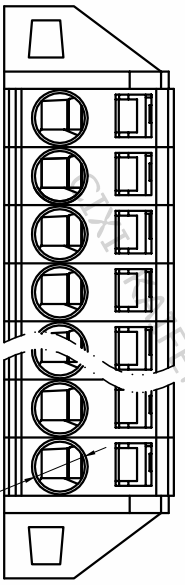

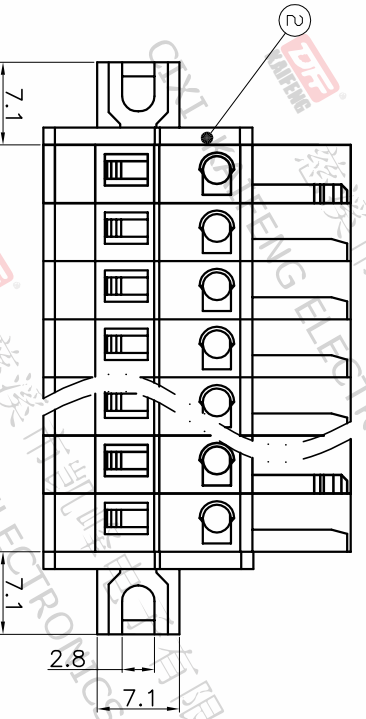


REV.	DESCRIPTION	DATE	DRAFTER	APPROVER
A1	DWG.REL	2020.06.10	DENG	JIN

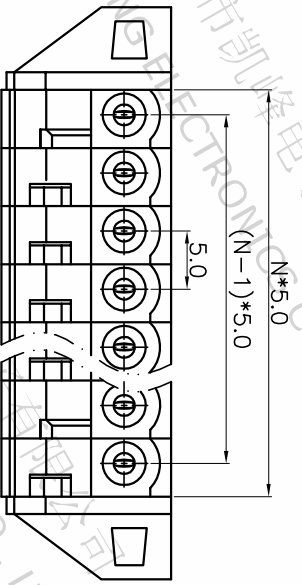

- Material
 - ①Housing: PA66, UL94V-0
 - ②Plastic cover: PA66, UL94V-0
 - ③Clip: Copper alloy, Silver plating.
 - ④Reed: Stainless steel

- Electrical


UL	IEC
Rated Voltage: 300V	400V
Rated Current: 15A	16A
Contact Resistance: 20mΩ	
Insulation Resistance: 500MΩ/1000V	
Withstanding Voltage: AC1500V/1Min	
Wire range: 28-12AWG	0.2-2.5mm ²

- Mechanical

Temperature Range: -30°C~+105°C
MAX Soldering: +250°C.(5 Seconds)

• RoHS compliance

HOW TO ORDER
KF450B-5.0-XXP-1 X-XXXXX

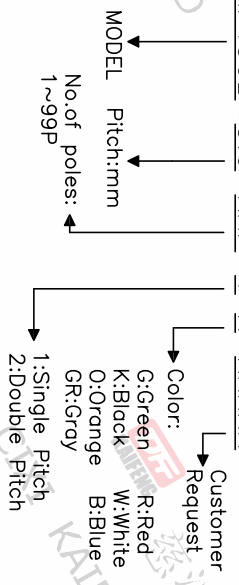

Pitch range	Nominal dimension range	PROJECTION
>0	>30	0.1/10
>6	>60	0.1/10
>10	>100	0.1/10
~6	~100	0.1/10
~10	~150	0.1/10
~24	~150	0.1/10
±0.15	±0.30	±2°
±0.20	±0.30	±2°
±0.30	±0.50	±2°
±0.50	±0.70	±2°
±1.00	±1.00	±2°
±1.30	±1.30	±2°

DRAWING TYPE	CUSTOMER DRAWING	SHEET	1 OF 1
SCALE	1:1	SHEET	1 OF 1
DRAWING NO.	W16000112		
TITLE	KF450B-5.0-XXP-1X		
UNIT	mm		
SHEET SIZE	A4		
SERIES	KF450		

DF 慈溪市凯峰电子有限公司
CIXI KAIFENG ELECTRONICS CO.,LTD